


DX 30 BEV

ARTICULATED DUMPER

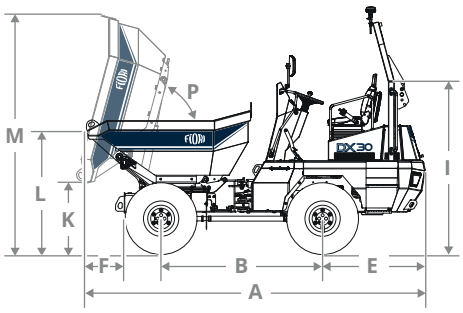



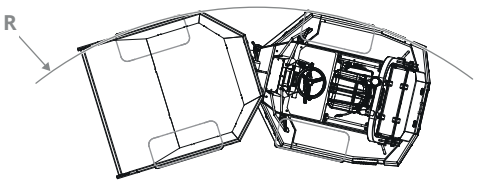

Engine		Battery Electric Vehicle
Model		e-comer
Engine cooling		Liquid-cooled
Continuous/peak power	kW	14/31
Rated battery std/opt	kWh	23,6
Voltage	V	51,2
On-board battery charger	kW	3,0

HYDRAULIC SYSTEM

Max capacity:	26 L/min
Max pressure:	180 bar
Total capacity:	40 L

DUMP BODY

Struck capacity:	1.390 L
SAE heaped capacity:	1.760 L

NOISE LEVEL

Guaranteed sound power level: 92 dB(A)

DRIVING POSITION

- Open driving position
- Dump body directional guide
- ROPS protection

MECHANICAL VALUES

Operating weight:	2.900 kg
Max mass:	5.900 kg
Payload:	3.000 kg
Transmission	Integrale 4X4
Steering:	Articolata
Towing capacity:	1.500 kg
Tires:	11.5/80 - 15.3 14 PR 400/70 - 18 14 PR

SPEED

	Forward	Reverse
Slow	0 - 8 km/h	0 - 8 km/h
Fast	0 - 20 km/h	0 - 8 km/h

DIMENSIONS

A. Length:	4.100 mm
B. Wheelbase:	1.950 mm
C. Width:	1.700 mm/1.800 mm
D. Wheel center to wheel center distance:	1.410 mm
E. Overhang:	1.235 mm
F. Dumping distance:	470 mm
G. Ground clearance:	285 mm
H. Total ROPS height:	2.800 mm
I. Height with folded ROPS:	2.085 mm
K. Max dumping height:	870 mm
L. Dump body height:	1.490 mm
M. Tipped dump body height:	2.895 mm
N. Dump body width	1.650 mm
O. Side dumping width:	215 mm
P. Max dumping height:	75°
R. Outer turning radius:	4.490 mm

TECHNICAL DATA SHEET